


# STRINGING INSTRUCTIONS



# AIR RESPONSE

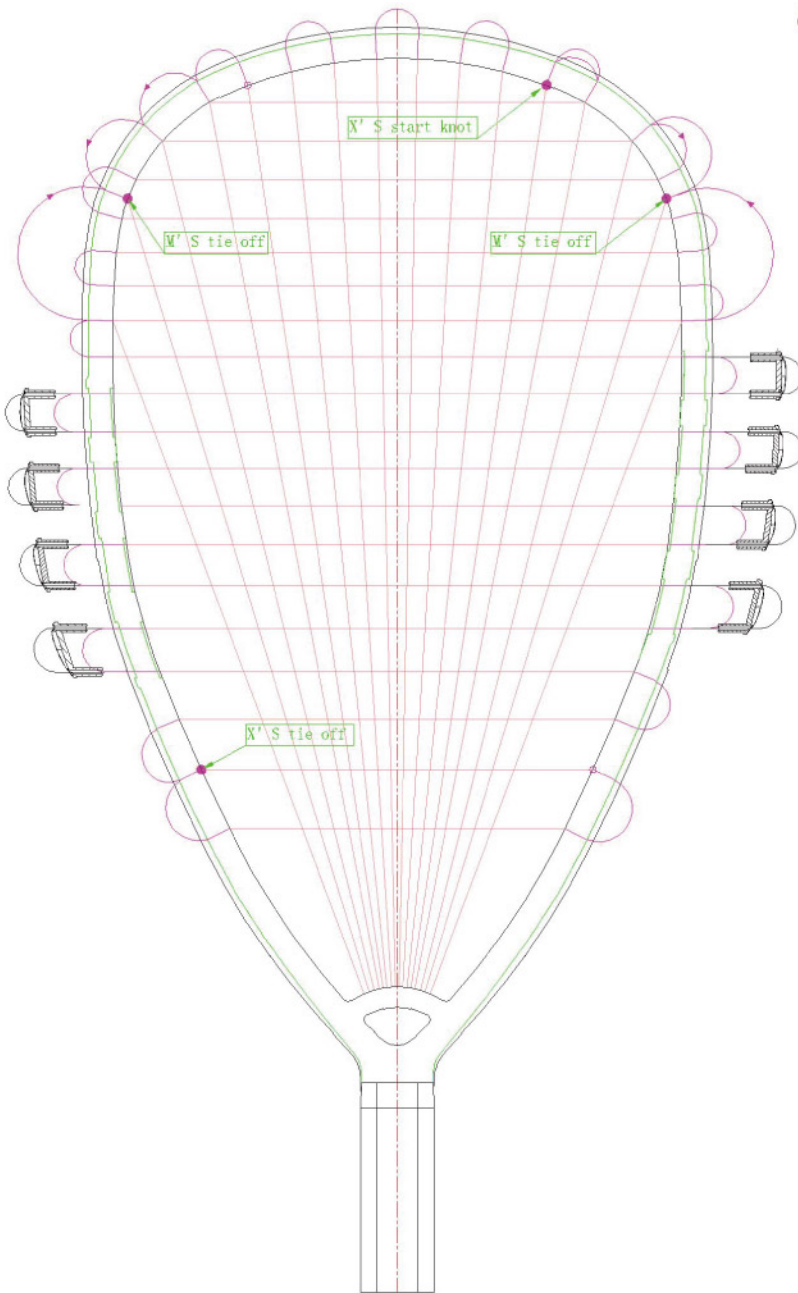

## String Instructions

### 2-Piece Stringing

String tension: 30 +/- 4

String pattern: Power Ring 16 x 19

Length: 23' Mains x 17' Crosses

### Mains

Start at head. M's skip at 7H, 9H, 10H, and 11H. Shared hole at 5H, 6H, and 12H.

Mount the racquet to the stringing machine with 1900 Power Level logo on the top of the racquet facing up.

\* Wrap the left half of the mains over the top and around the Power Ring, and the right half of the mains under then over the Power Ring.

### Mains

1. 1H-L to Power Ring back up to 2H-L (tension and clamp)
2. 1H-R to Power Ring back up to 2H-R (tension and clamp)
3. 3H-L to Power Ring back up to 4H-L (tension and clamp)
4. 3H-R to Power Ring back up to 4H-R (tension and clamp)
5. 5H-L to Power Ring back up to 6H-L (tension and clamp)
6. 5H-R to Power Ring back up to 6H-R (tension and clamp)
7. 8H-L to Power Ring back up to 12H-L (tension and clamp) and tie off at 8H-L
8. 5H-R to Power Ring back up to 6H-R (tension and clamp) and tie off at 8H-R

### Crosses

1. Tie starting knot at 6H-R
2. Start at 5H-R and weave across to 5H-L, then down to 6H-L and across to 6H-R
3. Continue installing cross strings conventionally. Finish and tie off at 2T-L.

\* It is recommended to use a table-brake when stringing cross strings.