


STRINGING INSTRUCTIONS



POWER RING FREAK

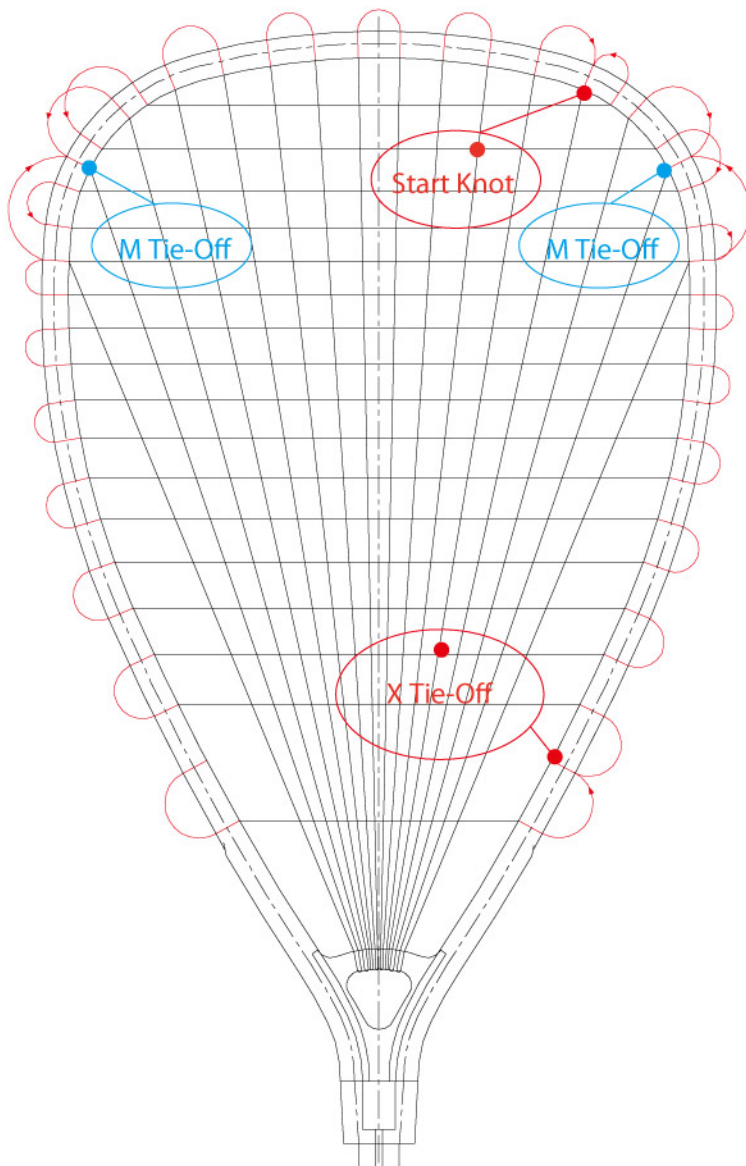

String Instructions

2-Piece Stringing

String tension: 30 +/- 4

String pattern: Power Ring 16 x 18

Length: 23' Mains x 17' Crosses

Mains

Start at head. M's skip at 6H, 8H, 10H, and 11H. Shared hole at 12H.

Mount the racquet to the stringing machine with the Ektelon logo on the butt cap facing up.

* Wrap the left half of the mains over the top and around the Power Ring, and the right half of the mains under then over the Power Ring.

1. 1H-L to Power Ring back up to 2H-L (tension and clamp)
2. 1H-R to Power Ring back up to 2H-R (tension and clamp)
3. 3H-L to Power Ring back up to 4H-L (tension and clamp)
4. 3H-R to Power Ring back up to 4H-R (tension and clamp)
5. 5H-L to Power Ring back up to 7H-L (tension and clamp)
6. 5H-R to Power Ring back up to 7H-R (tension and clamp)
7. 9H-L to Power Ring back up to 12H-L (tension and clamp) and tie off at 9H-L
8. 9H-R to Power Ring back up to 12H-R (tension and clamp) and tie off at 9H-R

Crosses

1. Tie starting knot at 4H-L
2. Start at 6H-L and weave across to 6H-R, then down to 8H-R and across to 8H-L.
3. Continue installing cross strings conventionally. Finish and tie off at 24H-L.

* It is recommended to use a table-brake when stringing cross strings.